


12-408

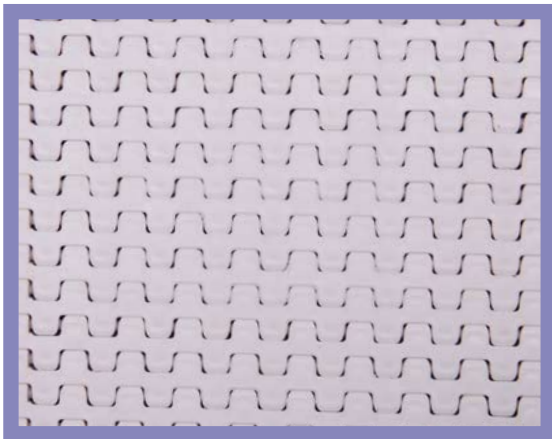

- Belt surface: Close belt with a smooth surface.
- Open area: 0%
- Strength: Ideal choice for light transportation.
- Material: PE, PP, POM.
- Application: Cooling belt for small nose bar/transfer.

HUB SPECIFICATION

	Number of teeth			
	10Z	19Z	24Z	28Z
Round bore (mm)	20ø	20ø 25ø 30ø	20ø 25ø	25ø 30ø 40ø
Square bore (mm)			25x25 40x40	25x25 40x40


bore available in inch size

BELT DATA

Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Polyethylene (PE)	600	4.5
Polypropylene (PP)	800	4.5
Polyacetal (POM)	1450	6

SPROCKET DATA

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)	Sprocket width (mm)
10	50	42	33	8
19	84	76	67	12
24	104	96	87	12
28	120	112	103	12

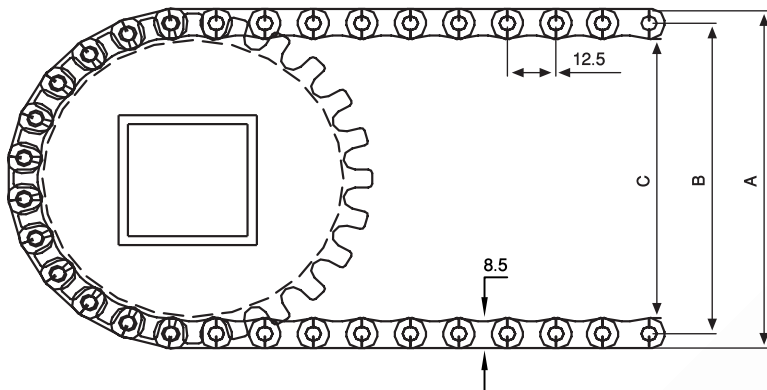

1:1

