


# 25-420

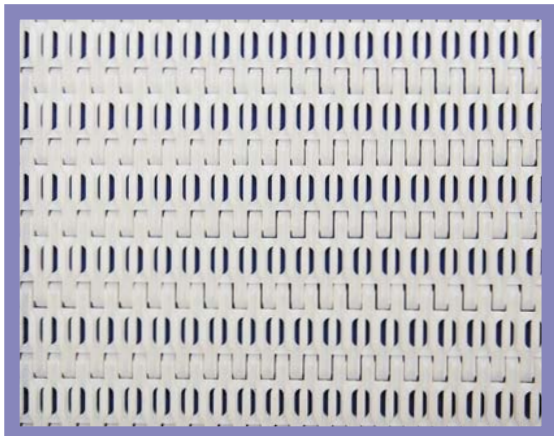


- Belt surface: Raised ribs - drained - for the use of finger transferplates.
- Open area: 14%. Biggest opening 10 x 2 mm.
- Strength: Ideal for medium weight transportation.
- Material: POM, PP.
- Accessories: Finger transfer plates.
- Application: Transportation of small products, such as bottles, pasteurizer, cooler.

### HUB SPECIFICATION

	Number of teeth			
	6Z	8Z	12Z	20Z
Round bore (mm)	20ø	20ø 25ø	25ø 30ø 40ø	25ø 30ø 40ø
Hexagon bore (mm)	24x24x24			
Square bore (mm)	25x25	25x25	38.1x38.1 40x40	38.1x38.1 40x40 60x60

bore available in inch size

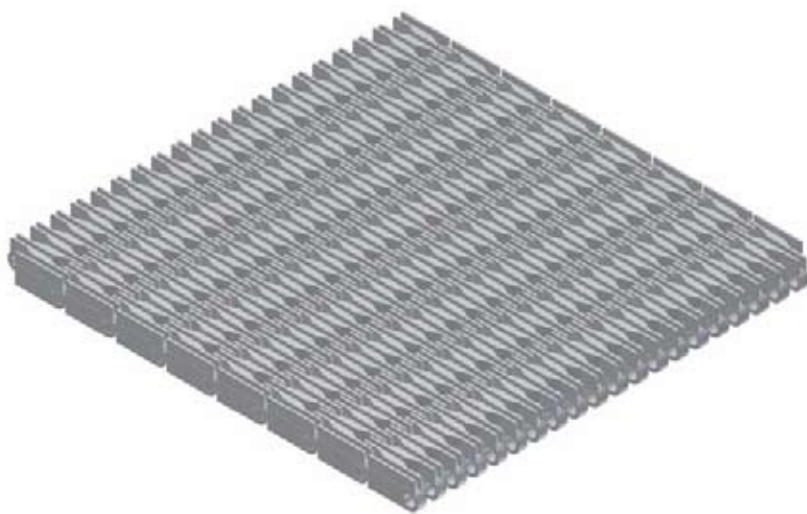

### BELT DATA

Materials	Max. belt pull kg/m of width	Belt weight kg/m <sup>2</sup>
Polypropylene (PP)	1200	8
Polyacetal (POM)	2400	11

### SPROCKET DATA

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)	Sprocket width (mm)
6	64	45	36	18
8	80	61	52	18
12	114	95	86	18
20	179	160	151	25



1:1

