


25-806

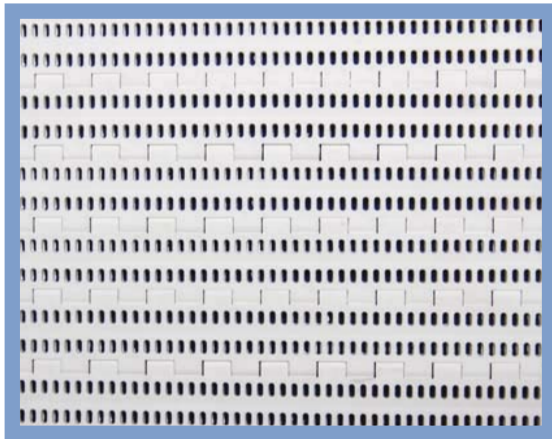

- ➔ Belt surface: Perforated flat top.
- ➔ Open area: 17%. Biggest opening 2 x 5 mm.
- ➔ Strength: An ideal choice for light transportation.
- ➔ Material: PE, PP, POM.
- ➔ Accessories: 25 and 50 mm flights.
25 and 50 mm side guards.
- ➔ Application: Seafood, dairy, vegetables, poultry, snacks, sweet goods...

HUB SPECIFICATION

	Number of teeth		
	6Z	12Z	20Z
Round bore (mm)	20ø	20ø	25ø
		25ø	30ø
		30ø	40ø
		40ø	40ø
Square bore (mm)		40x40	40x40
			60x60

bore available in inch size


BELT DATA

Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Polyethylene (PE)	550	5.5
Polypropylene (PP)	650	5.5
Polyacetal (POM)	1050	8

SPROCKET DATA

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)	Sprocket width (mm)
6	59	50	41	20
12	106	97	88	38
20	170	161	152	38

EASY TO CLEAN

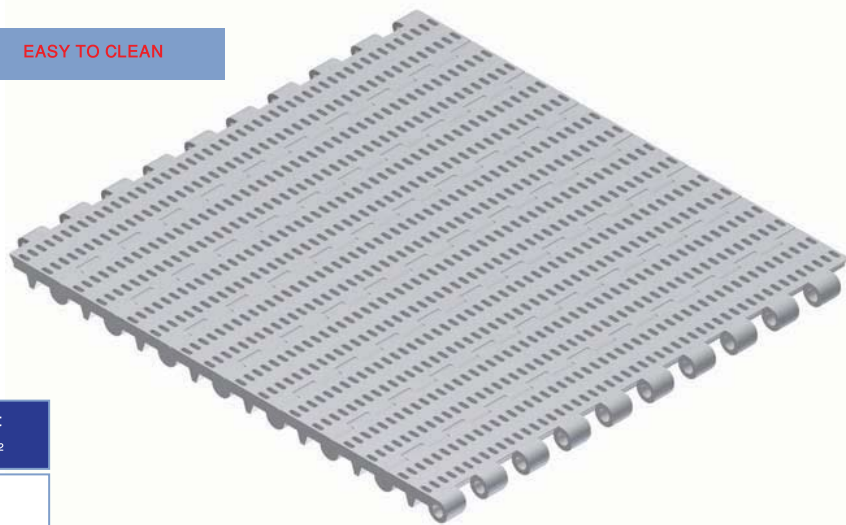

1:1

