


50-608F

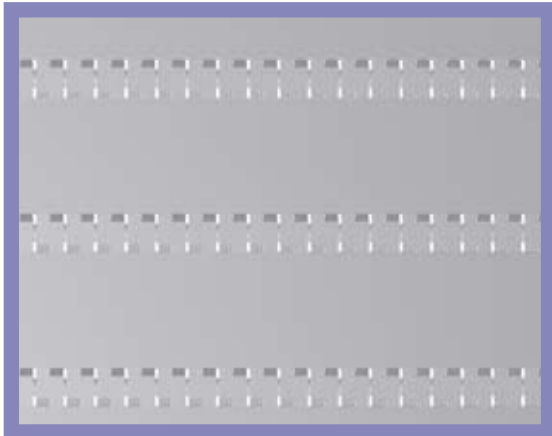

- ➔ Belt surface: Flat top.
- ➔ Open area: Closed.
- ➔ Strength: The right belt for medium-heavy transportation.
- ➔ Material/colour: PE, PP.
- ➔ Accessories: 25, 50, 75 and 100 mm high flights.
50, 75, 100 and 150 mm side guards.
- ➔ Application: Inclined conveyor.

HUB SPECIFICATION

| | Number of teeth | | | |
|------------------|-----------------|-----------|----------------|----------------|
| | 6Z | 8Z | 10Z | 12Z |
| Round bore (mm) | 25ø | 25ø | 30ø | 30ø |
| | 30ø | 30ø | 30ø | 40ø |
| | 40ø | 40ø | 40ø | 50ø |
| Square bore (mm) | 38.1x38.1 | 38.1x38.1 | 38.1x38.1 | |
| | 40x40 | 40x40 | 40x40 60x60 | 40x40 60x60 |


bore available in inch size

BELT DATA

| Materials | Max. belt pull kg/m of width | Belt weight kg/m ² |
|--------------------|---------------------------------|----------------------------------|
| Polyethylene (PE) | 1790 | 7 |
| Polypropylene (PP) | 2400 | 7 |

SPROCKET DATA

| No. of teeth Z | A=Outside diameter (mm) | B=Pitch diameter (mm) | C=Inside diameter (mm) | Sprocket width (mm) |
|-------------------|----------------------------|--------------------------|---------------------------|------------------------|
| 6 | 117 | 101 | 85 | 30 |
| 8 | 149 | 133 | 117 | 36 |
| 10 | 180 | 164 | 148 | 39 |
| 12 | 211 | 195 | 179 | 39 |

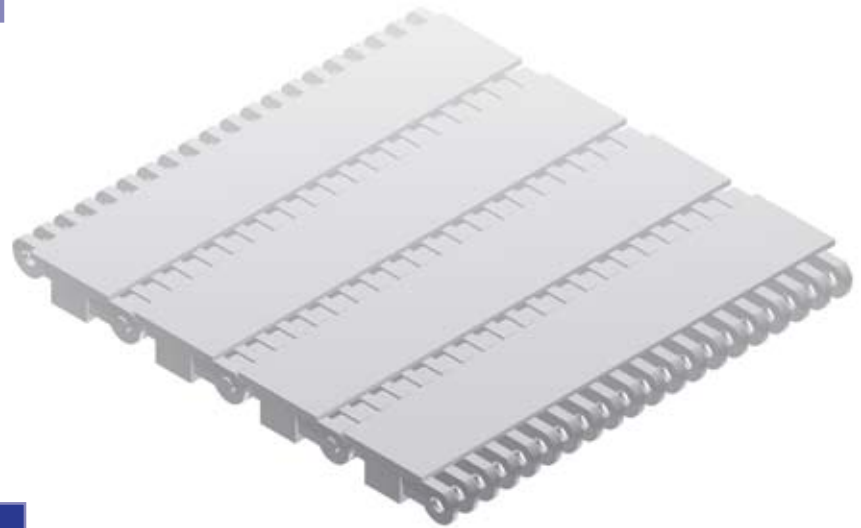

1:1

